





Metal Buzzer
Model No:MM-6V

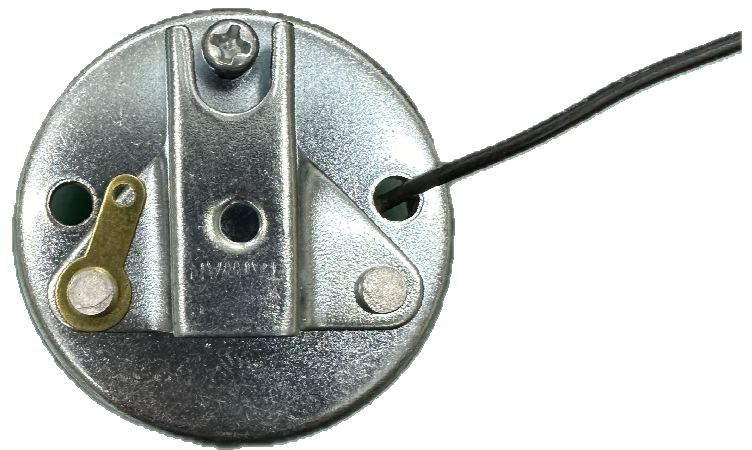

ELECTRICAL CHARACTERISTICS OF MODEL NO:MM-6V

Rated Voltage(VDC)	6 VDC(Typical)
Operation Voltage(VDC)	5~7
Current Consumption Max (mA)	$\leq 150\text{mA}$ at 6VDC
S.P.L(at 10 ft.)	$\geq 86\text{dB}$ at 6VDC
Tone	Continuous sound
Housing Material	Ammonium plating
Resonant Frequency(Hz)	650 ± 100
Operating Temperature($^{\circ}\text{C}$)	$-10\sim +60$
Storage Temperature($^{\circ}\text{C}$)	$-20\sim +70$
Lead Wire	Black 1007 #22 85.4mm

DIMENSION:

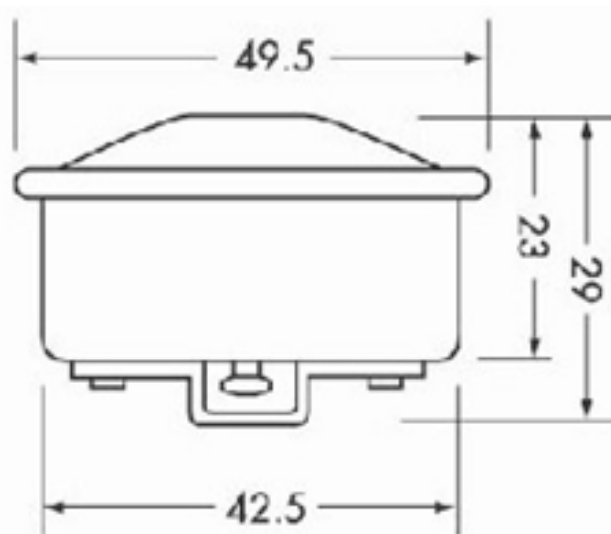

Tolerance : $\pm 0.5\text{mm}$

